


Dimension: (Unit: mm)

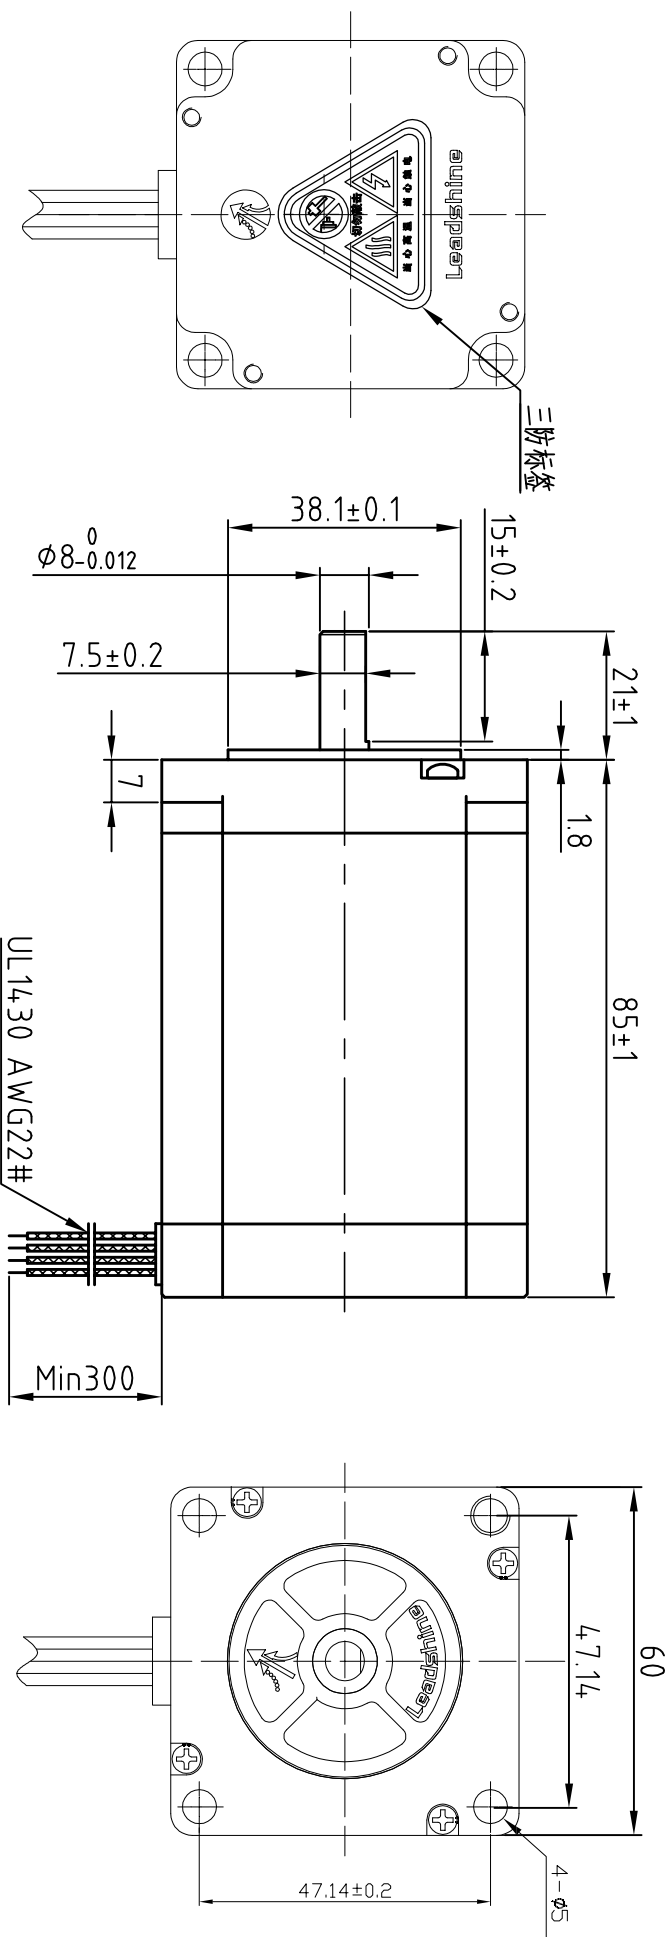

版本 Rev	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By
V1.0	20.04.17		兼容57毫米铁架	王洪松
V2.0	21.05.31		铁架改为1.8	王洪松


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	156 V
DC Resistance/phase ±10%	0.62 Ω
Inductance/phase ±20%	2.8 mH
Holding torque	3.1 N·M
Inertia	0.84 kg·cm ²
Weight	1.4kg

Motor Connections:

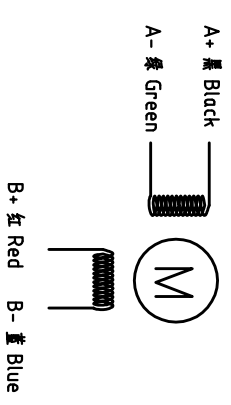

设计 Designed	王洪松	日期 Date	2020.04.17	材料 Material				深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建		2020.04.17	第一角画法 First angle projection	比例 Scale	图例 Symbol	名称 Title	混合式步进电机
批准 Approved	黄捷建		2020.04.17	版本/版次 Version/Scale	A/02	图例 Symbol		D57CM31-4A MS20
料号 Part No.	LS-MT-01-07A			共 1 套 Total	第 1 套 No. 1	第 1 套 No. 1	图号 DWG. NO.	LS-D57CM31-4A MS20