
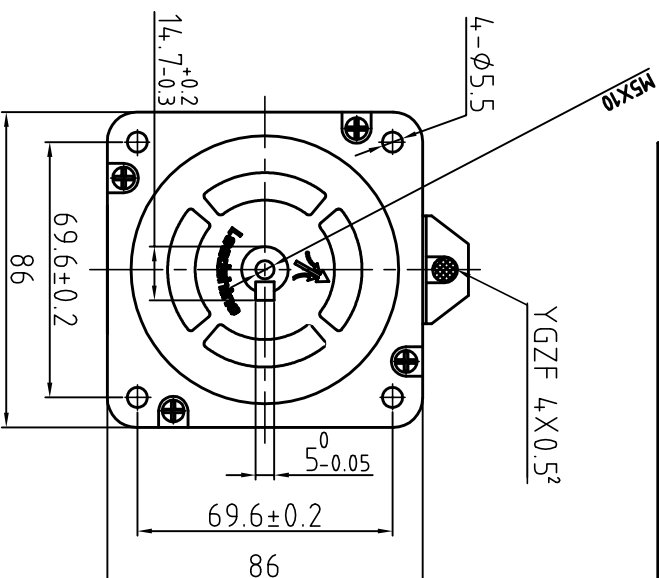
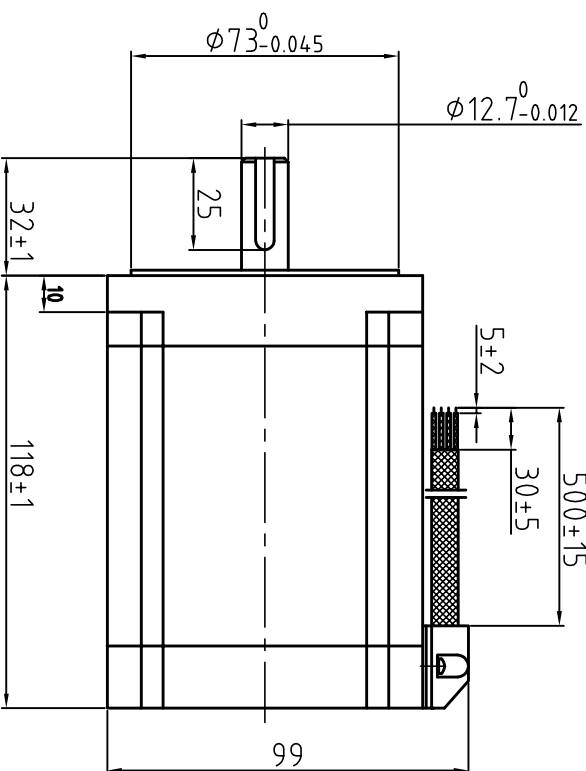


Dimension: (Unit: mm)

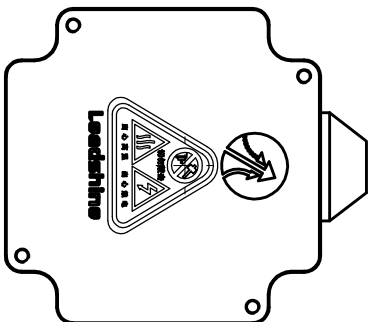

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revision	设计 By
V1.0	18.6.12		新增MSX10编码器	王琳琳


### Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

### Specification

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.53 Ω
Inductance/phase	4.25 mH
Holding torque	8.5N·M
Inertia	2.7 kg·cm²
Weight	3.8 kg

### Motor Connections

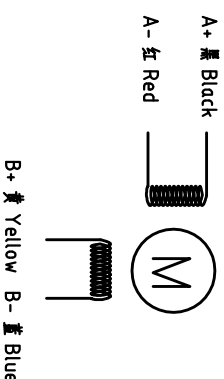

设计 Designed	王琳琳	日期 Date	18.6.12	材料 Material		深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄桂章		18.6.12	第一角画法 First Angle projection		混合式步进马达
批准 Approved	黄桂章		18.6.12	版本/版次 Scale	比例 Scale	86CM85-0-S
料号 Part No.	LS-MT-01-07A		共 1 套 第 1 套	Sheet 1 of 1	图号 DWG. NO.	LS-86CM85-0-S