

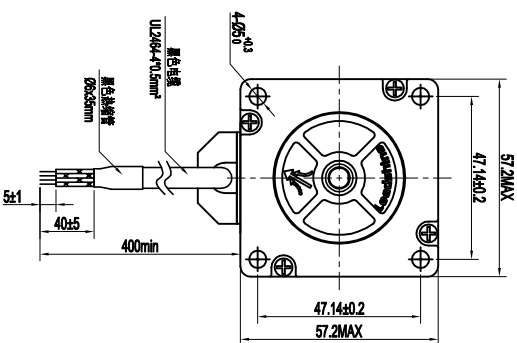

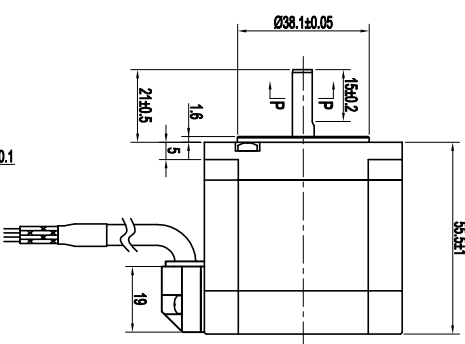


DIMENSIONS Unit:mm

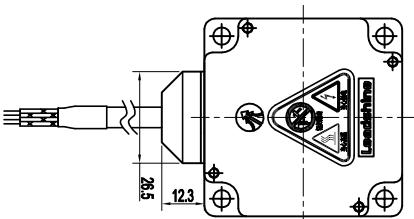

□ 电机接线图  
BLK 黑 A  
GRN 绿 A



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Current/phase	3.0 A
Voltage	2.4 V
DC Resistance/phase ±10%	0.8 Ω
Inductance/phase ±20%	2.8 mH
Holding torque	1.3 N·M
Detent torque	0.04 N·M
Inertia	0.3 kg·cm <sup>2</sup>
Weight	0.72 kg

设计 Designed	何明强	日期 Date	2021.04.28	材料 Material	SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	黄捷建	2021.04.28	第一角画法 First angle projection	图例 Title	混合式步进电机		
批准 Approved	黄捷建	2021.04.28	版本/版次 A/01	比例尺 Scale	57CM13-3A MS30		
零件号 Part No.	LS-MT-01-07A	共 1 套 1 of 1	第 1 套 1 of 1	图号 DWG NO.	LS-57CM13-3A MS30		

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪林