


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.5.19		新版	王洪松
V2.0	19.7.1		增加压线块	王洪松

Dimension: (Unit: mm)

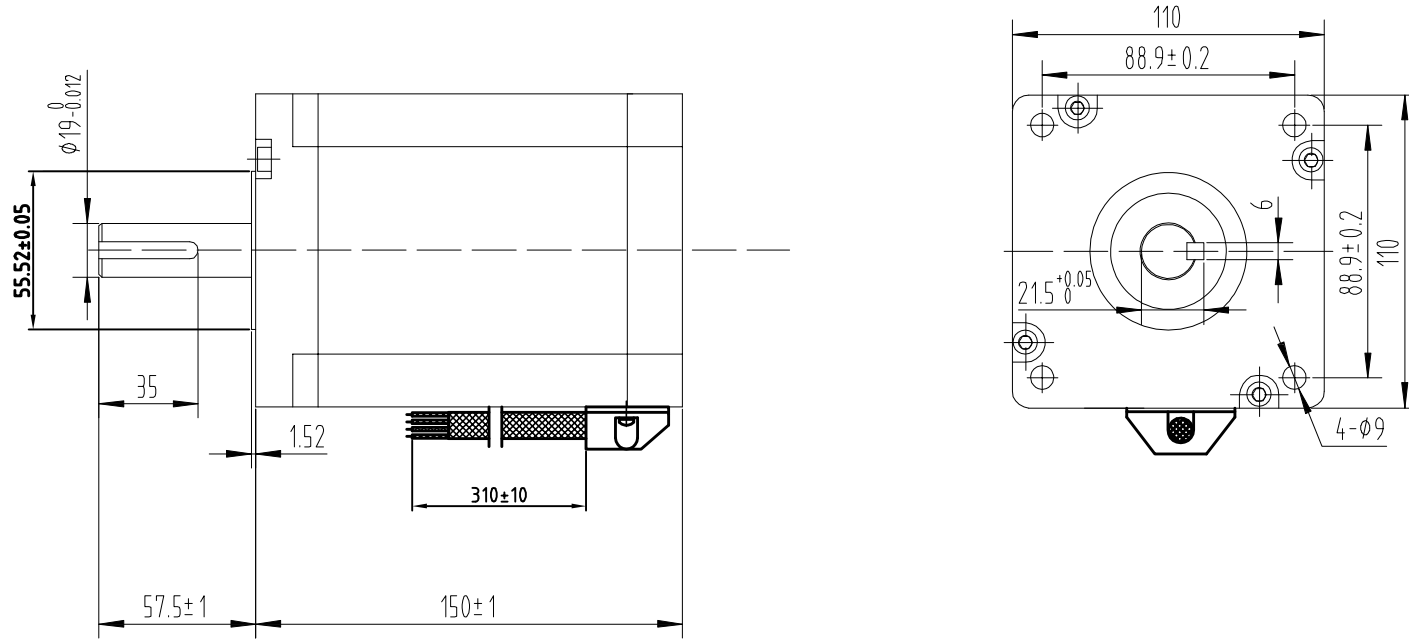


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.5 A
Voltage	3.6V
DC Resistance/phase	0.72 Ω
Inductance/phase	13 mH
Holding torque	20 N·M
Inertia	10.9kg·cm ²
Weight	8.4 kg

Motor Connections

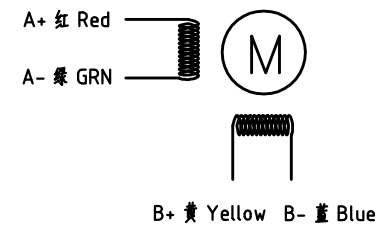

设计 Designed	王洪松	日期 Date	19.7.1	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄维强	19.7.1		第一角画法 First Angle projection	名称 Title 混合式步进马达
批准 Approved	黄维强	19.7.1		版本/版次 A/02	110CM20 MS20
零件编号 Part No.	LS-MT-01-07A			比例 Scale	图号 DWG. NO.
				阶段标记 Stage Mark	LS-110CM20 MS20
				共 1 页 第 1 页 Sheet 1 of 1	